


Graph 1

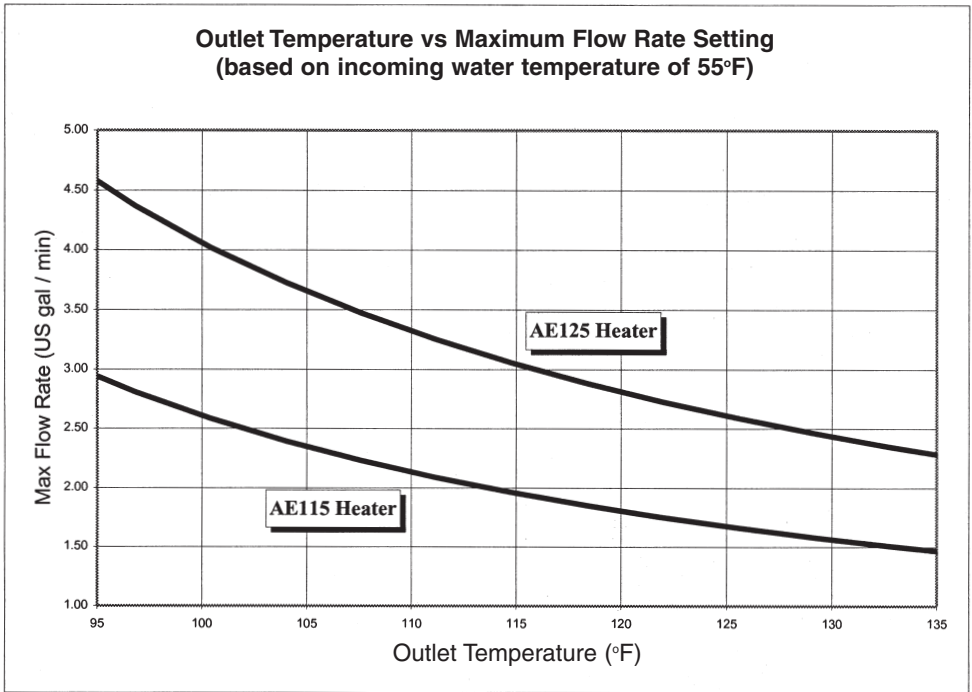

For example:

- For the AE115 unit, using a ball valve, ensure the flow rate does not exceed 2.3 US gallons / minute.
- For the AE125 unit, using a ball valve, ensure the flow rate does not exceed 3.5 US gallons / minute.

Note: These figures are based on an inlet water temperature of 55°F and a supply voltage of 240 volts. If the inlet water temperature is lower than 55°F, or if the supply voltage is less than 240 volts, then the outlet temperature will be lower than what is shown in Graph 1. If a higher outlet water temperature is desired, then reduce the flow rate and/or supply the unit with 240 volts.

IMPORTANT

Before leaving the site, the installer should demonstrate the unit to the user and give them this guide.